

Equine Facility Products

Manufactured and Imported by




INSTALLATION INSTRUCTIONS

17, 19, 32, 57 series - Neptun High Bay Fixtures

FIXTURE MOUNTING:

- A.) Disconnect power supply and remove existing fixture (if applicable).
- B.) Mounting hook found in Figure A can be used to hang fixture from pendulum or chain.
- C.) For Pendant Mounting, the hook must be removed.
 - Remove (2) screws located on each side of the gear box cover plate. (Figure A)
 - Remove the washer that secures the hook to the gear box cover, then remove the hook.
 - Attach the gear box cover plate to the ballast housing.
 - A 3/4" (NPT) pipe can be screwed directly into the gear box cover plate.

Figure A

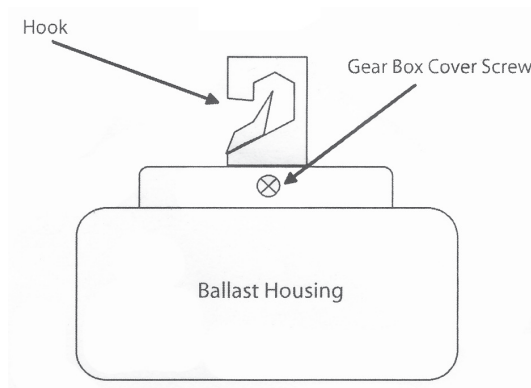


FIXTURE WIRING:

- A.) Disconnect power supply and remove existing fixture (if applicable).
- B.) Fixture will be provided with whip (power cord).
- C.) For hard wire, please see wiring diagram below.
- D.) For fixtures provided with whip and plug, plug the cord into the existing box.

NOTE: For bulb and ballast wiring instructions, please see (Figure B).

Figure B

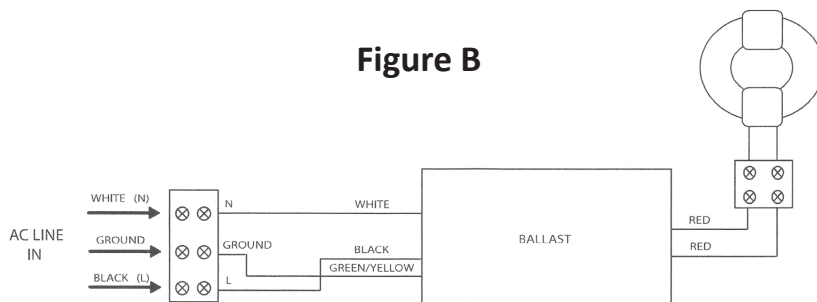

CAUTION!

DISCONNECT POWER SUPPLY BEFORE INSTALLATION OR MAINTENANCE. INSTALLATION OF THIS PRODUCT SHOULD BE DONE BY A FULLY QUALIFIED AND LICENSED ELECTRICIAN OR TECHNICIAN.

